



Leveline Water Level Loggers

The Leveline records highly accurate water level and temperature measurements in groundwater and surface water applications. Housed inside an all titanium body is a ceramic level sensor, temperature sensor, 10-year lithium battery and a versatile datalogger with capacity for 500,000 data points.

The Leveline Absolute uses a piezoresistive ceramic pressure sensor to provide excellent durability and long-term stability whilst delivering an impressive accuracy of 0.05% FS. A variety of level ranges are available and all of them are temperature compensated across a scale of -20 to 80 deg. C.

The Leveline can record as much as 10 readings per second to once every 24 hours. Event based logging can be used to respond to a set level or temperature change with the option of scheduling logging which is faster or slower for a defined time frame to maximise memory and battery usage.

Features

- 0.05% FS accuracy.
- 500,000 data point memory.
- 10 year battery life.
- Replaceable battery.
- Titanium body.
- 5 year warranty.
- Included LevelLink PC Software for basic and advanced data compensation.
- SDI-12, RS485/MODBUS direct out communications.
- 22mm x 186mm.

Applications

- Groundwater level monitoring, pump tests, slug tests etc.
- Stream, lake and reservoir water level measurement.
- Wetland and flood water monitoring.
- Coastal monitoring.
- Tank level measurement.
- Long term continuous monitoring in boreholes, surface water and seawater applications.

Leveline Battery and Logging

The Leveline is set up using the LevelLink PC Software, Leveline Meter or Quick Deploy Key. A variety of logging types are available these include Linear, Event Based, Schedule, Future Start, Future Stop, Deployed Start and Real Time View.



LevelLink PC Application

Data Management, Viewing and Export

Data is downloaded into the LevelLink PC application. This intuitive software allows for data to be compensated and then exported. Basic compensation can be carried out by using a Leveline-Baro file to correct the level data for atmospheric pressure.

Advanced features include, density correction, manual barometric pressure correction, salinity and EC correction, field zero correction, averaging and automatic depth to water corrections. A bulk data correction facility is also available to compensate multiple Leveline files at once.


Data can be exported in raw or compensated formats into .csv formats for further processing outside of the LevelLink application.

LeveLine Water Level Loggers



Deployment Options

The LeveLine is designed to be deployed using our rugged deploy cord, which is available in 10, 20, 30 and 100 meter lengths and is easily cut to size and secured to the eyelet in the Delrin cap and attached to a suitable well cap assembly.

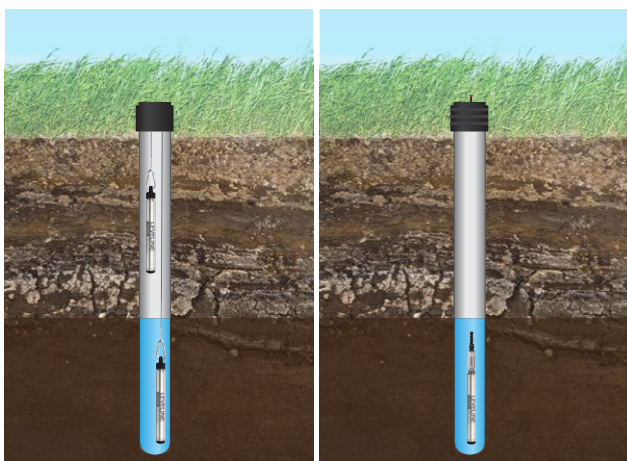

Example LeveLine Deployments

Direct read cables are available in set or customisable lengths up to 500 meters. This convenient method keeps the LeveLine in a fixed place and removes the need to remove the LeveLine to extract the data.

Direct Out SDI-12 RS485/MODBUS communication is available across the range of LeveLine water level loggers when used with a direct read cable. This in-built feature removes the need for an external converter saving time and minimising the footprint of the deployment on site.

As power is drawn from the third-party device the internal battery is switched off enhancing the versatility of the LeveLine. The LeveLine is compatible with any third-party data logger or telemetry device supporting these protocols.

Communication Options.

LeveLine PC Kit

Data is downloaded from the LeveLine via a USB PC Kit connected the LeveLink application.

LeveLine Meter

is available to remove the need to take your computer into the field. Data can be gathered from multiple LeveLine's and later downloaded to your PC for compensation.



See exactly where the LeveLine logger came from, in Google Earth with the completely unique GPS embedding feature

In addition, the LeveLine meter can embed the GPS co-ordinates to your data, allow your to configure the LeveLine logging rates, view live data and calibrate the conductivity sensor when using a LeveLine-CTD.

Quick Deploy Key

The Quick Deploy Key is a simple device which allows the safe initiation of a pre-programmed logging scheme at the time of deployment. The Quick Deploy Key can also zero the depth and zero the logger to start it in the field if no scheme has been pre-programmed in LeveLink. An LED displays battery level, memory capacity and performs a self-test on the LeveLine.



LeveLine-BARO Atmospheric Pressure Logger

The LeveLine-BARO Logger records atmospheric pressure in mbar, psi, kPa, bar, mbar, mmHg, inHg, cmH2O and inH2O. It is the preferred method to compensate the absolute data recorded by the LeveLine using the LeveLink PC application. This LeveLine-BARO data can be downloaded and exported separately for further analysis of site conditions.

The LeveLine-BARO is deployed onsite away from the highest water level. One LeveLine-BARO is suitable for multiple LeveLine's within a 10km radius.

Leveline Water Level Loggers

Specifications



		LEVELINE (Abs & Gauge)	LEVELINE - BARO
General	Temperature ranges (non freezing)	Operational: -20-80° C (-4-176° F) Storage: -40-80° C (-40-176° F) Compensated: -20-80° C (-4-176° F)	Operational: -20-80° C (-4-176° F) Storage: -40-80° C (-40-176° F) Compensated: -20-80° C (-4-176° F)
	Diameter	22mm (0.866 in)	22mm (0.866 in)
	Length	186mm (7.32 in)	186mm (7.32 in)
	Weight	150g (5.3oz)	160g (5.6oz)
	Materials	Titanium body, Delrin nose cone	Titanium body, Delrin nose cone
	Output options	Modbus/RS485, SDI-12, Aquaread proprietary	Modbus/RS485, SDI-12, Aquaread proprietary
	Battery type & life	3.6V lithium; up to 10 years (see note 1)	3.6V lithium; up to 10 years (see note 1)
	External power	6 - 24 VDC	6 - 24 VDC
Memory	Size	8.0 MB	2.0 MB
	Data Records	500,000	150,000
	Log types	Linear, Event & User-Selectable Schedule with Future Start, Future Stop, Deploy Start and Real Time View	Linear, Event & User-Selectable Schedule with Future Start, Future Stop, Deploy Start and Real Time View
	Fastest logging rate & Modbus rate	10 per second	1 per minute (logging) 5 per second (Modbus)
	Fastest SDI-12 output rate	1 per second	1 per second
	Real-time clock	Accurate to 1 second/24-hr period (± 6 minutes/year)	Accurate to 1 second/24-hr period (± 6 minutes/year)
Pressure Sensor	Type / Material	Piezoresistive; ceramic	
	Range (Absolute)	10.0m (32.8 ft) 50.0m (164 ft)	20.0m (65.6 ft) 100m (326 ft)
	Range (Gauge)	10.0m (32.8 ft) 50.0m (164 ft)	20.0m (65.6 ft) 100m (326 ft)
	Maximum pressure	Max 2x range, Burst 2.5x range	
	Accuracy (FS) (see note 2)	±0.05% FS	
	Resolution	0.002% FS or 1mm whichever is greater	
	Units of measure	Pressure: mbar (psi, kPa, bar, mmHg, inHg, cmH2O, inH2O, Level: in, ft, mm, cm and m available in LevelLink)	Pressure: mbar (psi, kPa, bar, mbar, mmHg, inHg, cmH2O and inH2O available in LevelLink)
Temperature Sensor	Accuracy Resolution	±0.1° C 0.01° C	±0.1° C 0.01° C
	Output Units	Celsius (fahrenheit available in LevelLink)	Celsius (fahrenheit available in LevelLink)

Notes: 1) Dependent on logging rate. 2) Across factory-calibrated pressure and temperature ranges